
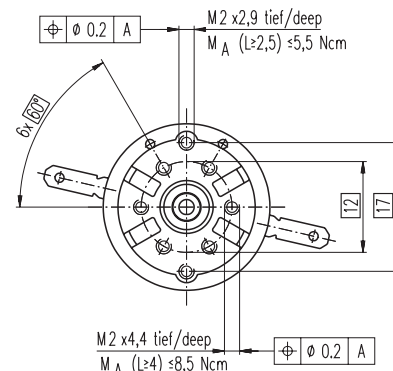
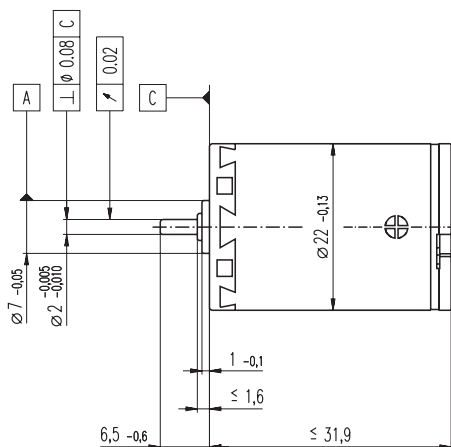


# A-max 22 Ø22 mm, Precious Metal Brushes CLL, 5 Watt, CE approved

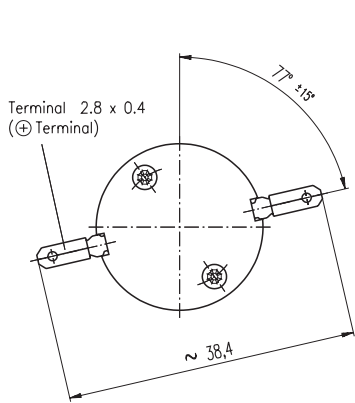


## M 1:1

- Stock program
- Standard program
- Special program (on request)

Order Number													
110117	110119	110120	110121	110122	110123	110124	110125	110126	110127	110128	110129		

Motor Data		110117	110119	110120	110121	110122	110123	110124	110125	110126	110127	110128	110129	
Values at nominal voltage														
1	Nominal voltage	V	6.0	9.0	9.0	12.0	12.0	15.0	18.0	24.0	30.0	36.0	48.0	48.0
2	No load speed	rpm	9640	9980	8770	10400	9410	10300	9970	10700	10800	9800	9290	8380
3	No load current	mA	29.6	20.9	16.9	16.9	14.2	13.1	10.4	8.83	7.20	5.07	3.48	2.94
4	Nominal speed	rpm	7480	7350	6150	7820	6760	7620	7310	8060	8160	7090	6520	5620
5	Nominal torque (max. continuous torque)	mNm	4.81	6.33	6.42	6.36	6.31	6.29	6.25	6.23	6.18	6.15	6.03	6.10
6	Nominal current (max. continuous current)	A	0.840	0.757	0.673	0.597	0.533	0.465	0.374	0.301	0.241	0.181	0.126	0.115
7	Stall torque	mNm	21.5	24.1	21.5	25.5	22.5	24.5	23.5	25.2	25.1	22.3	20.3	18.6
8	Starting current	A	3.65	2.81	2.21	2.34	1.86	1.77	1.37	1.19	0.957	0.641	0.414	0.343
9	Max. efficiency	%	83	84	84	84	84	84	84	84	83	83	83	
Characteristics														
10	Terminal resistance	Ω	1.64	3.20	4.07	5.13	6.46	8.48	13.1	20.2	31.3	56.2	116	140
11	Terminal inductance	mH	0.106	0.222	0.288	0.362	0.445	0.584	0.890	1.37	2.10	3.68	7.29	8.95
12	Torque constant	mNm / A	5.90	8.55	9.73	10.9	12.1	13.9	17.1	21.2	26.2	34.8	48.9	54.3
13	Speed constant	rpm / V	1620	1120	981	875	790	689	558	450	364	274	195	176
14	Speed / torque gradient	rpm / mNm	452	418	410	412	422	422	428	429	435	443	462	454
15	Mechanical time constant	ms	19.1	18.8	18.7	18.7	18.7	18.7	18.8	18.8	18.9	19.1	19.0	
16	Rotor inertia	gcm <sup>2</sup>	4.04	4.29	4.35	4.33	4.24	4.24	4.18	4.18	4.14	4.07	3.95	3.99

Specifications		
Thermal data		
17	Thermal resistance housing-ambient	20 K / W
18	Thermal resistance winding-housing	6.0 K / W
19	Thermal time constant winding	10.1 s
20	Thermal time constant motor	540 s
21	Ambient temperature	-30 ... +65°C
22	Max. permissible winding temperature	+85°C
Mechanical data (sleeve bearings)		
23	Max. permissible speed	16000 rpm
24	Axial play	0.05 - 0.15 mm
25	Radial play	0.012 mm
26	Max. axial load (dynamic)	1 N
27	Max. force for press fits (static)	80 N
28	Max. radial loading, 5 mm from flange	2.8 N

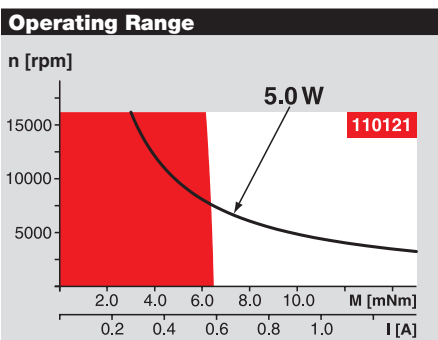

**Comments**

**Continuous operation**  
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.  
= Thermal limit.

**Short term operation**  
The motor may be briefly overloaded (recurring).

— **Assigned power rating**

Mechanical data (ball bearing)		
23	Max. permissible speed	16000 rpm
24	Axial play	0.05 - 0.15 mm
25	Radial play	0.025 mm
26	Max. axial load (dynamic)	3.3 N
27	Max. force for press fits (static)	45 N
28	Max. radial loading, 5 mm from flange	12.3 N
Other specifications		
29	Number of pole pairs	1
30	Number of commutator segments	9
31	Weight of motor	54 g
CLL = Capacitor Long Life		
Values listed in the table are nominal. Explanation of the figures on page 49.		
Option		
Ball bearings in place of sleeve bearings		
Pigtails in place of terminals		
Without CLL		

**maxon Modular System** Overview on page 17 - 21

**Planetary Gearhead**  
Ø22 mm  
0.1 - 0.6 Nm  
Page 217 / 218

**Planetary Gearhead**  
Ø22 mm  
0.5 - 1.0 Nm  
Page 219

**Planetary Gearhead**  
Ø22 mm  
0.5 - 2.0 Nm  
Page 220

**Spur Gearhead**  
Ø24 mm  
0.1 Nm  
Page 223

**Recommended Electronics:**  
LSC 30/2 Page 264  
Notes 17